


## Features

- 100A switching capability
- Single coil and double coils are available
- Terminal configuration LNNL, External accessories such as manganese copper shunts and transformers can be ordered according to customer requirements
- Breakdown voltage (between contact and coil):4KV
- Meet standard of IEC62052-31:2005 UC3
- Environment-friendly product(RoHS compliant)
- Outline Dimensions:(54.9x35x17.7)mm
- Can be integrated design, convenient automatic installation and production
- Power frequency interference resistance, and good consistency
- Main application: smart meter

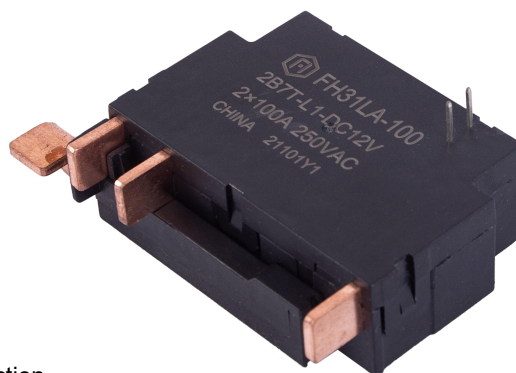

## ■ CHARACTERISTICS

Specifications	Item				
Contact Data	Contact arrangement		2A, 2B		
	Contact resistance(initial)		≤1.0mΩ(6VDC 1A)		
	Contact material		AgSnO <sub>2</sub>		
Rated value	Rated load(Resistance load)		100A 250VAC		
	Max.switching voltage		277VAC		
	Max.switching current		100A		
	Max.switching capacity		25000VA		
Electrical performance	Insulation resistance(initial)		1000MΩ(500VDC)		
	Dielectric strength (Initial)	Between open contacts	2000VAC 1min		
		Between coil&contacts	4000VAC 1min		
	Closing time		≤25ms		
	Opening time		≤25ms		
Mechanical performance	Shock resistance	Functional	98m/s <sup>2</sup> (10g)		
		Destructive	980m/s <sup>2</sup> (100g)		
	Vibration resistance		10Hz~55Hz 1.5mm DA		
Endurance	Mechanical		1×10 <sup>5</sup> ops		
	Electrical	ON/OFF=1S/9S	100A 250VAC		1.5×10 <sup>4</sup> ops(COS ϕ =1)
	Electrical UC3 <sup>(1)</sup>	ON/OFF=10S/20S	80A	5000ops(COS ϕ =1)	Total 10000ops
			230VAC	5000ops(COS ϕ =0.5)	
Operate condition	Ambient temperature		-40℃~85℃		
	Humidity		5%~85%RH		
Termination			Plug-in needle type+Screw type(XB)		
Unit weight			Approx.90g (Without attachment)		
Construction			Flux proofed		

Note: (1) Electrical endurance meet IEC62055-31 test requirements,do the inductive load test after the resistive load test.



## ■ COIL DATA(23℃)

### ■ Single coil latching

Nominal Voltage	Closing Voltage VDC	Opening Voltage VDC	Rated Current (±10%)	Coil Resistance (±10%)	Nominal Power	Max Voltage
DC 6V	≤4.50	≤4.50	0.5A	12Ω	3W	DC 9V
DC 9V	≤6.75	≤6.75	0.33A	27Ω		DC 13.5V
DC 12V	≤9.00	≤9.00	0.25A	48Ω		DC 18V
DC 24V	≤18.00	≤18.00	0.125A	192Ω		DC 36V

### ■ Double coils latching

Nominal Voltage	Closing Voltage VDC	Opening Voltage VDC	Rated Current (±10%)	Coil Resistance (±10%)	Nominal Power	Max Voltage
DC 6V	≤4.50	≤4.50	1/1A	6/6Ω	6W	DC 9V
DC 9V	≤6.75	≤6.75	0.67/0.67A	13.5/13.5Ω		DC 13.5V
DC 12V	≤9.00	≤9.00	0.5/0.5A	24/24Ω		DC 18V
DC 24V	≤18.00	≤18.00	0.25/0.25A	96/96Ω		DC 36V

## ■ ORDERING INFORMATION


**FH31LA-100 2B 1 T -L1 R W -XXX -DC6V**

- ① Type
- ② Contact arrangement: 2A=2 open contacts  
2B=2 close contacts
- ③ PCB mounting: 1=Type A, 7=Customized Accessories
- ④ Contact material: T=AgSnO<sub>2</sub>
- ⑤ Coil type: L1=Single coil latching, L2=Double coils latching
- ⑥ Polarity: Nil=standard polarity R=reversed polarity
- ⑦ Pin state: None=Standard straight pin state, W=Curved pin state, W1=Pin position 2&4 top cover out needle
- ⑧ Customer special code: numbers or letters denote customer's requirements
- ⑨ Coil specification: DC6/9/12/24V




## ■ WIRING DIAGRAM AND PC BOARD LAYOUT(Unit:mm)

### Standard polarity wiring diagram

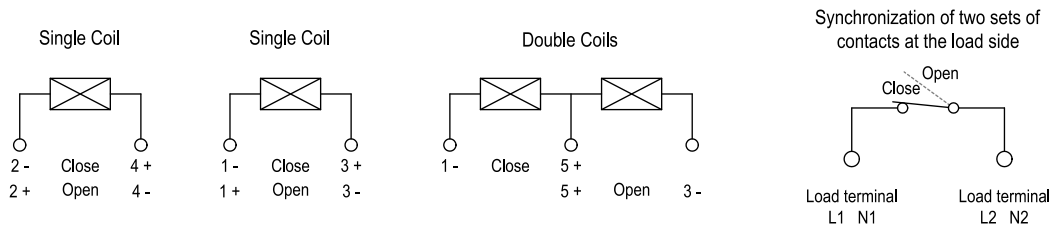

### Outline Dimensions

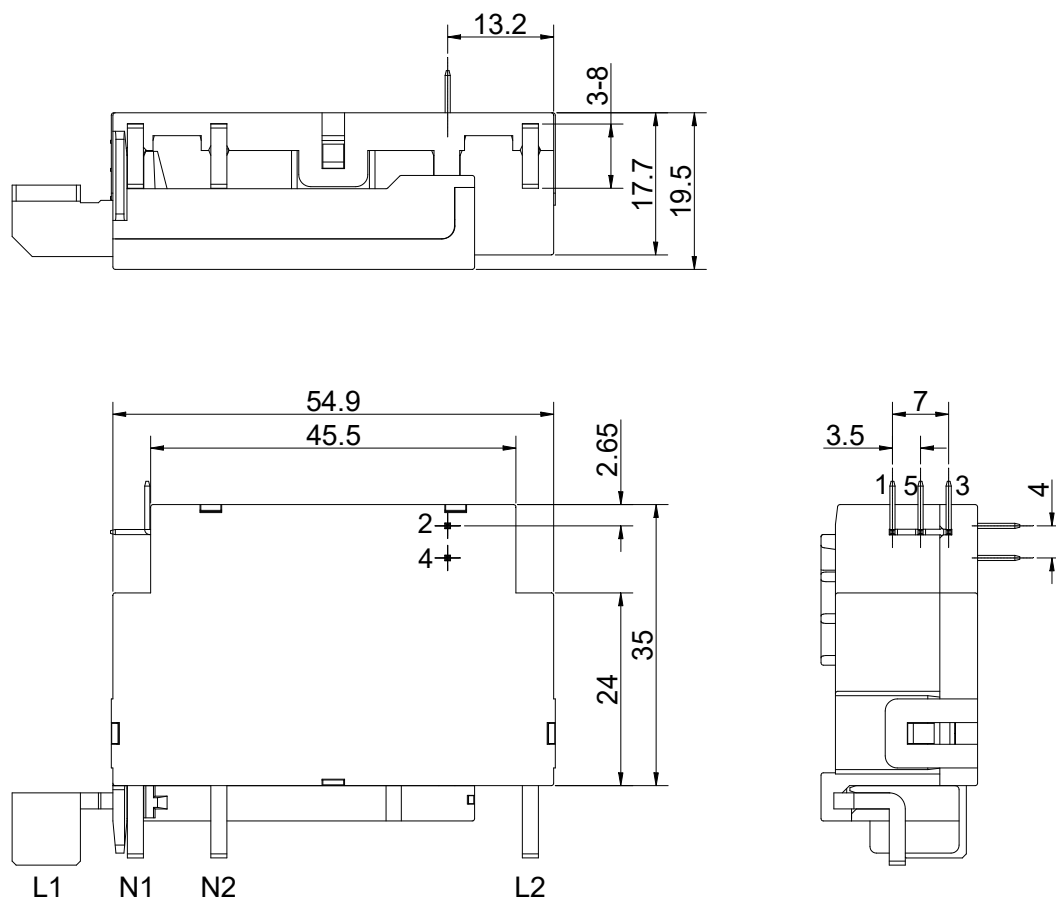


Remark:(1)In case of no tolerance shown in outline dimension:outline dimension $\leq$ 1mm,tolerance should be $\pm$ 0.2mm;outline dimension  $>$ 1mm and  $<$ 5mm,tolerance should be  $\pm$ 0.3mm;outline dimension $\geq$ 5mm,tolerance should be  $\pm$ 0.5mm.

(2) The tolerance without indicating for PCB layout is always  $\pm$ 0.1mm.



## ■ TYPICAL CASES

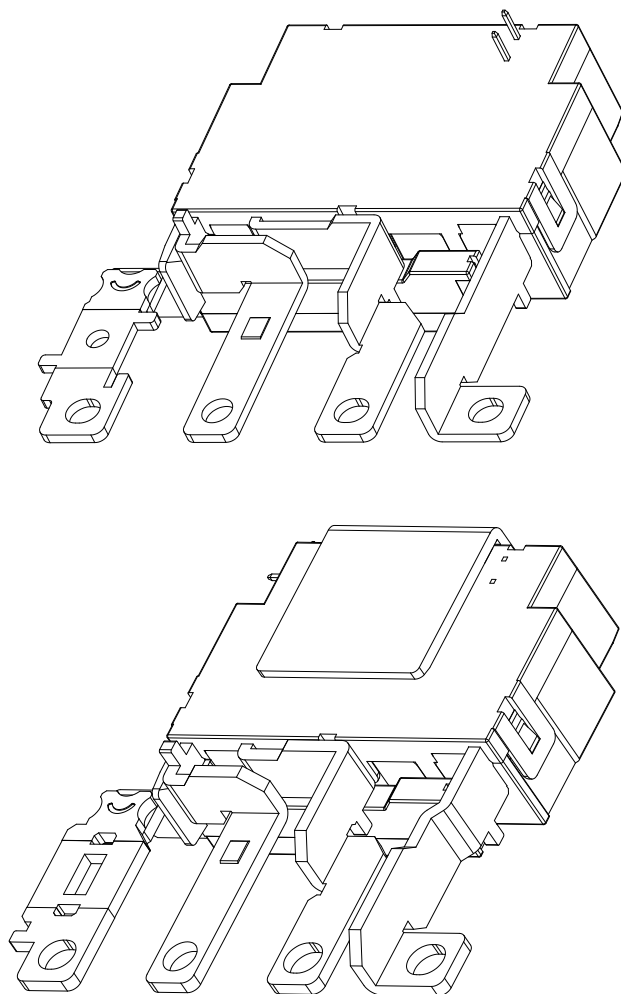

## ■ NOTICE

- ① For the state of latching relay as delivered, If the customer has no special requirements, we default to the closed state before delivery, but due to transportation or relay installation by shock and other factors may change the state, so please reset it to the closed or open state as needed when using;
- ② In order to maintain the initial performance parameters of the relay, please be careful not to drop the product or be affected by external force;
- ③ In order to maintain "opening" or "closing" status, energized voltage applied across the coil should reach the rated voltage, it is recommended that the actual driving voltage be 1~1.5 times the rated voltage, Pulse width  $\geq 100\text{ms}$ , and do not energize to "opening" coil and "closing" coil simultaneously, long energized time (more than 1 min) should also be avoided;
- ④ Normally the load terminals are not suitable for reflow solder, wave solder or tin solder, we suggest use spot welding. Load terminals shall be prevented from assembly stress;
- ⑤ Latching relays are customized products, the above cases are only for reference. If you have any questions, please contact Fanhar for more technical support;
- ⑥ The specification is for reference only. Specifications subject to change without notice.

